

THE EASY ACCESS STORAGE CO. INC.

the safe and easy storage solution



REFRIGERATED STORAGE

Info sheet

THE EASY ACCESS STORAGE CO.

REFRIGERATED STORAGE INFOSHEET

UNIT DESCRIPTION

Refrigerated temperature controlled storage units are suitable for temporary or permanent storage of temperature sensitive merchandise such as perishables goods or climate controlled merchandise. The internal cold storage area consists of a high grade stainless steel surface finish, a polyurethane insulation and a slotted aluminum T-floor. The units provide secure indoor or outdoor ground level temperature controlled storage facilitating safe, reliable and convenient accessibility to perishables and other temperature sensitive merchandise.



ROTARY CONVERTER (OPTIONAL)

A rotary phase converter (RPC) maybe required where access to 3-Phase power is not supplied or simply unavailable on site, often rural areas and remote location must compensate for the absence of 3-Phase industrial power by simply installing a 3-phase converter to accommodate the refrigerated units power requirements, refer to the following link for details regarding the recommended converter for the intended application.

<http://phase-quest.com/product/rotary-phase-converter-25-hp/>

DELIVERY

Our Refrigerated Units are delivered on site and position within a designated setting. Perimeter constraints may pose certain restrictions, in such an instance a site survey may be required to determine the degree of difficulty and/or ascertain whether additional off loading equipment maybe required prior to delivery of all units on premises (indoors or out).

THE EASY ACCESS COLD STORAGE CO. INC. offers complete installation of the reefer unit indoors or out.

WARRANTY

The equipments' system panel is inspected and pre-tripped prior to release. Parts and technical support are offered under warranty for a period of (3) one month following the point of sale of all climate controlled equipment line in inventory

VALUE-ADDED OPTION

The Easy Access Cold Storage Co. offers a Comprehensive post-sale maintenance program. The program is designed to include an extended warranty on parts only for and additional (3) months over the previous agreement extending the duration of the warranty to a total period of (6) three months from the point of sale.

TERMS AND CONDITIONS

The extended warranty includes coverage of all electrical and mechanical reefer components related to the cooling system exclusively. An approved technician must perform parts repairs, replacements, and workmanship.

PACKAGE VALUE (REFURBISHED UNIT)

- Transformer (optional)
- Installation / Delivery
- (3) Month standard warranty on parts

8x20ft Refrigerated Storage	
Mod-20-STD Walk-in Unit (basic)	\$8,950
Paint	\$650
Protective grid	excluded
(3)month warranty	included
Light fixture(s)	excluded
Vinyl curtain	excluded
Side Access doorway(s)	excluded

8x40ft Refrigerated Storage	
Mod-40-HC Walk-in Unit (basic)	\$9,850
Paint	\$850
Protective grid	excluded
(3)month warranty	included
Light fixture(s)	excluded
Vinyl curtain	excluded
Side Access doorway(s)	excluded


8X20FT REFRIGERATED WALK-IN UNIT



EXTERIOR			INTERIOR			CAPACITY	WEIGHT
LENGTH	WIDTH	HEIGHT	LENGTH	WIDTH	HEIGHT	CAPACITY	TARE
20'0"	8'0"	8'6"	18'10"	7'6"	7'5"	1170 Cu. Ft.	7,055Lbs
6,19m	2,44m	2,90m	6,90m	2,28m	2,25m	66,27cbm	3,200kgs
AIR EXCHANGE CAPACITY		EVAPORATOR FAN CAPACITY (CFM)		COOL CAPACITY BTU/ HB		TEMP CONTROL RANGE	
CFM	CBM/HR	CFM	CBM/HR	29000/16000		+/-25C	R40



8X40FT REFRIGERATED WALK-IN UNIT

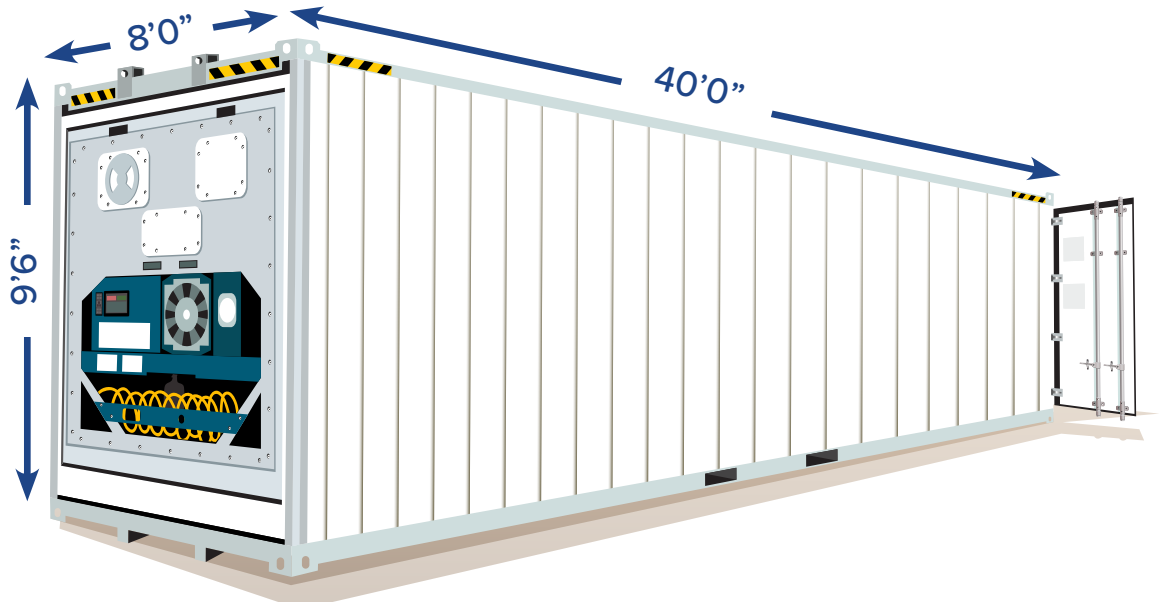

EXTERIOR			INTERIOR			CAPACITY	WEIGHT
LENGTH	WIDTH	HEIGHT	LENGTH	WIDTH	HEIGHT	CAPACITY	TARE
40'0"	8'0"	9'6"	38'10"	7'6"	8'5"	2340 Cu. Ft.	9,700 Lbs
6,19m	2,44m	2,90m	11,60 m	2,28m	2,25m	66,27cbm	4,400kgs
AIR EXCHANGE CAPACITY		EVAPORATOR FAN CAPACITY (CFM)		COOL CAPACITY BTU/ HB		TEMP CONTROL RANGE	
CFM	CBM/HR	CFM	CBM/HR	29000/16000		+/-25C	R40



REFRIGERATED STORAGE UNITS

FEATURES AND ADVANTAGES



Self sustained cooler/freezer unit



PVC curtains available to hold refrigerated air in



Immediate installation and accessibility



Can be re-locatable



Inexpensive, eliminates need to lay concrete floor



Available 8x40ft sizes



Easy to clean stainless steel interior



Extended warranties available



Designed to freeze or chill products as required



Emergency response service included



ISO cooling/freezing units can be modified for stationary use. These units are delivered and emplaced as required on premises.

Provision for an electrical supply of 460/480 3-phase 30 AMPS MAX / 19 running is required for optimal performance, consult your local electrician for installation.